

## HS1160 MediaSignage Player

The Hughes HS1160 is an advanced, Linux-based digital media player that is designed to provide high-definition video and image playback as part of a digital communication solution.

The player is capable of storing more than 200 hours of HD video and can be configured to play in remote locations with a wide range of content and layouts.

The Hughes HS1160 arrives as a ready-to-install appliance. Using a simple setup wizard, the customer connects the player to the network as well as to the Hughes MediaSignage Server. Once the player is connected, it receives the necessary content and information to assume the playback role that it is assigned. Players can be moved from location to location, updating the proper information each time.

The Hughes HS1160 player supports a range of template designs and layouts—providing the ability to play video, still images, and scroll data feeds simultaneously. The player also supports touchscreens and can be turned into a kiosk simply by changing the content and layout assignments.

The player is designed for reliability and will continue to play its assigned content, even if the network connection is disabled.

The Hughes HS1160 is a core component of the following Hughes solution packages:

- Breakroom TV
- Digital Menu Boards
- Digital Concierge
- Digital Promo Board
- Lobby/Waiting Area TV
- Video Walls
- and much more...



### Feature Highlights

- Intel N100 3.4 GHz 4 Core Processor
- Intel Alder Lake-N Platform (SOC)
- 4K Video Ready
- 8 GB Memory
- 256 GB SSD
- OS Support: Linux Debian
- Small Form Factor: 1.33" (H) x 4.96" (W) x 4.33" (D)
- Applications: Hughes MediaSignage CMS Powering




### Technical Specifications

<b>Processor</b>	Intel N100 3.4 GHz 4Core 4Threads
<b>Chipset</b>	Intel Alder Lake-N Platform (SOC)
<b>Graphics</b>	Intel 12th Generation UHD Graphics 1 x HDMI, supporting a maximum resolution up to 4K at 60 Hz 1 x DP 1.4 supporting resolution up to 4K at 60 Hz
<b>Memory</b>	8 GB
<b>Network</b>	Gigabit (10/100/1000 Mb/s) LAN 802.11 ac/n Dual-Band Wi-Fi
<b>Storage</b>	256 GB SSD
<b>Audio</b>	1 x 3.5mm analog stereo audio jacks
<b>Back Panel</b>	1 x HDMI port 1 x miniDP port 1 x USB Type-C port (Optional: for Graphics) 1 x LAN port 1 x 3.5mm audio jack (Also Support S/PDIF) 1 x DC IN Jack

<b>OS Support</b>	Linux Debian
<b>Environment</b>	Operating Temperature: 10 to +55 °C Non-operating temperature: -20 to +70 °C Vibration - Operating: 9.8 m/s <sup>2</sup> (1.0G) 5 to 500Hz Vibration - Non operating: 49 m/s <sup>2</sup> (5.0G) 15 to 500Hz Shock - Operating: 3,920 m/s <sup>2</sup> (400G) 2ms Shock - Non-Operating: 8,820 m/s <sup>2</sup> (900G) 1ms Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing) MTBF: 100,000 Hours FCC, CE, RoHS Certified

### Hughes MediaSignage Infrastructure

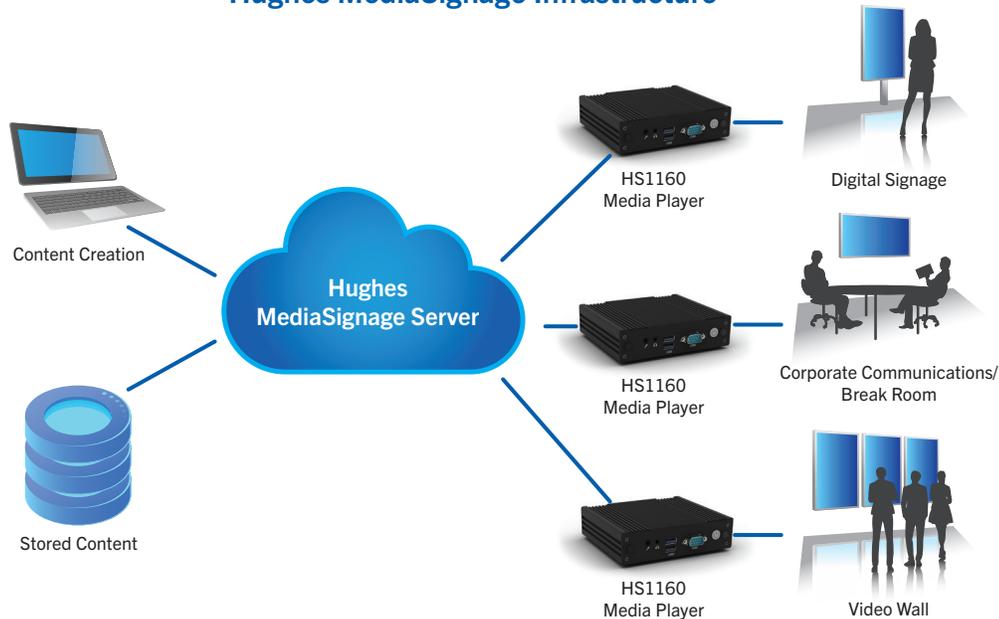

For additional information, please call 1-888-440-7126 or visit [hughes.com/signage](http://hughes.com/signage).